


R557F: MIXING MANIFOLD WITH FLOW METER + WILO CIRCULATION PUMP

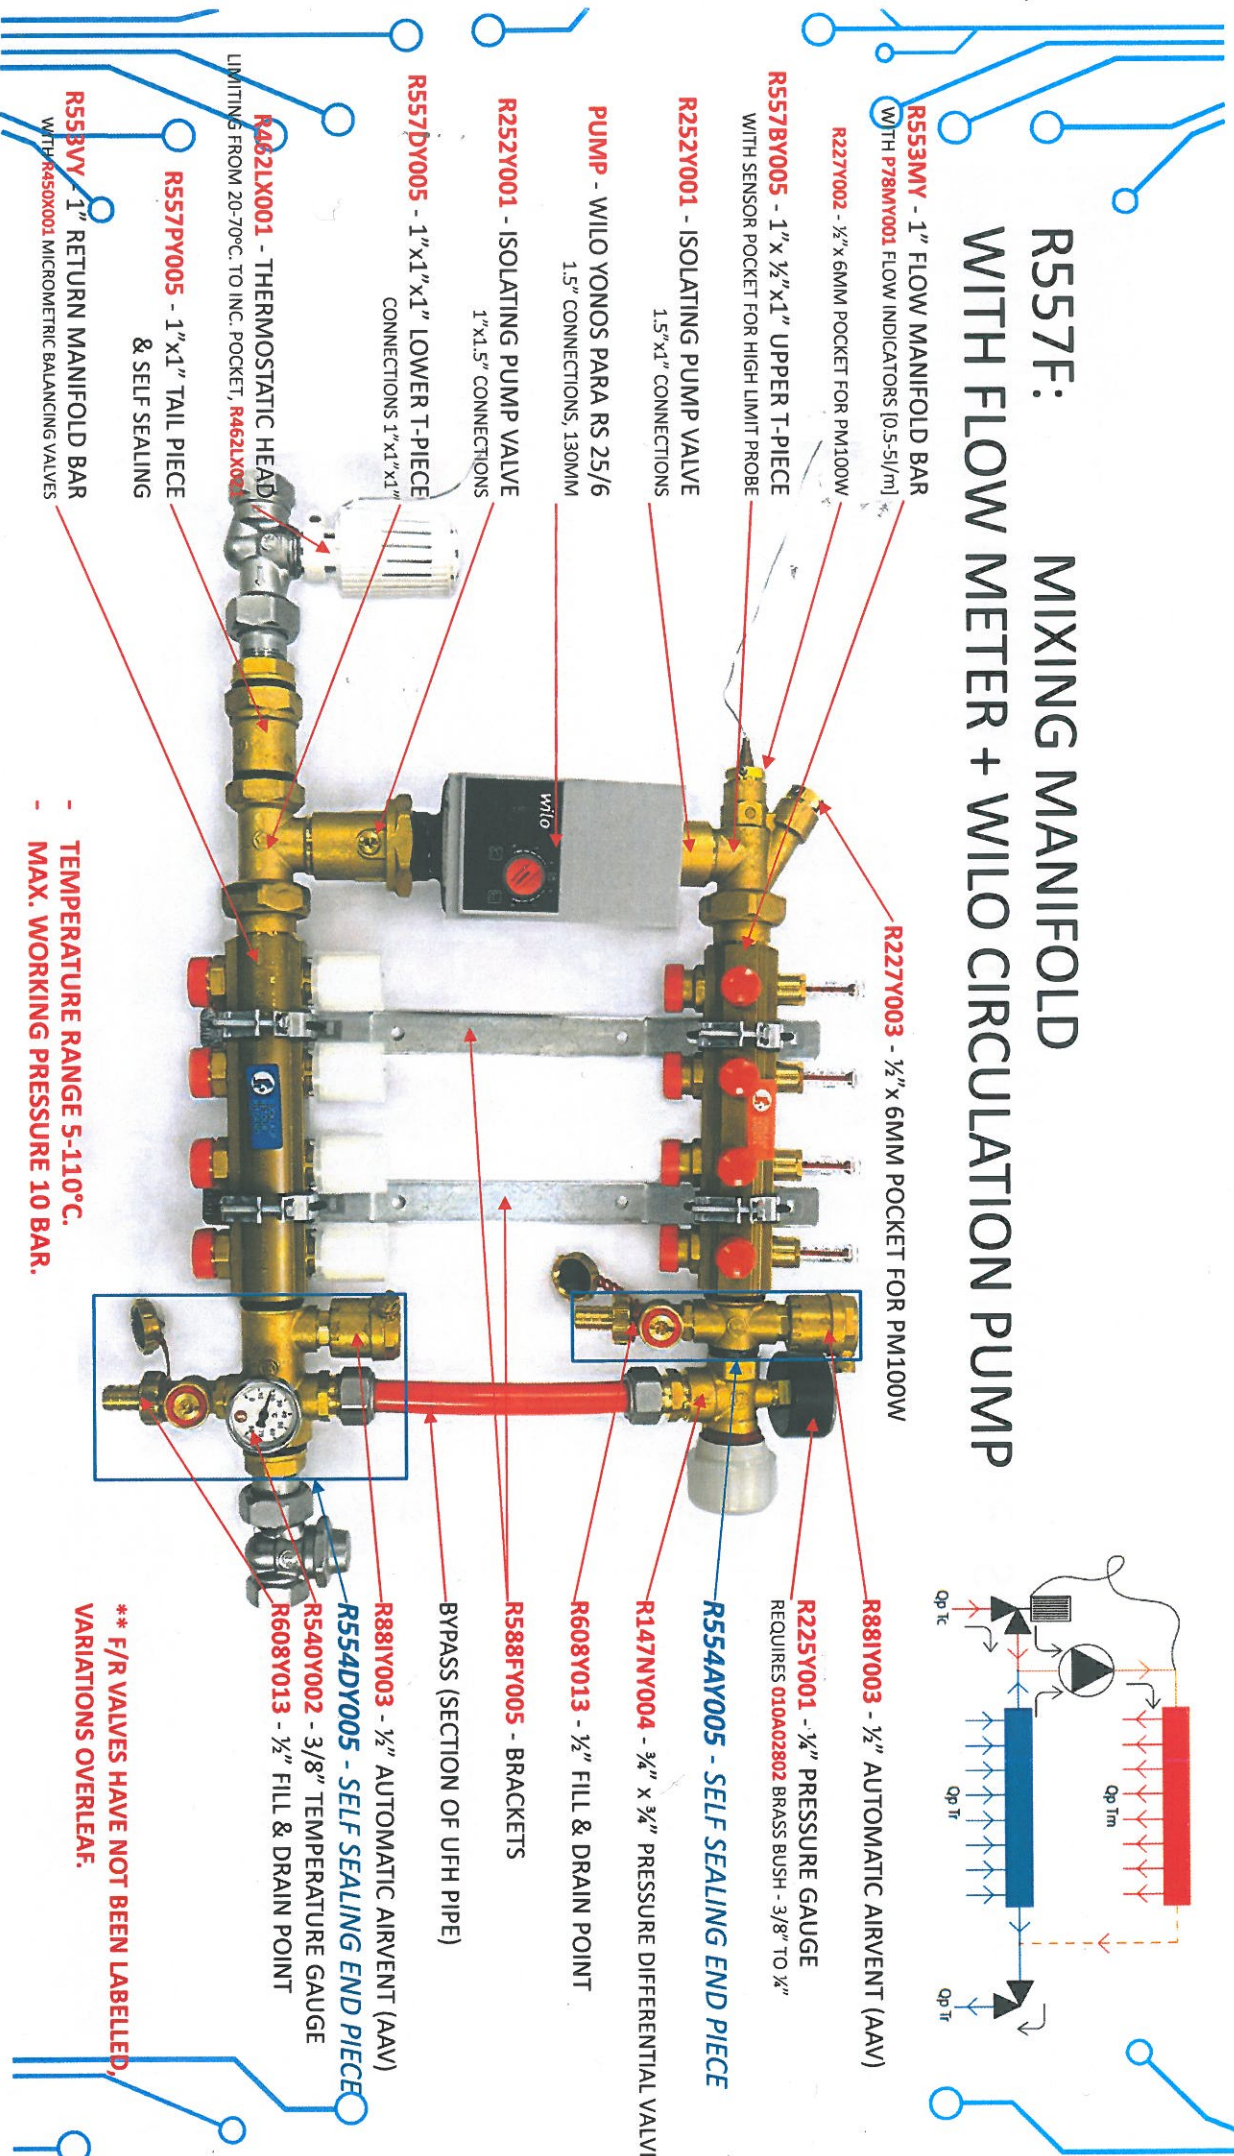

R553MV - 1" FLOW MANIFOLD BAR
(WITH P78MY001 FLOW INDICATORS [0.5-5l/m])

R227Y002 - 1/2" x 6MM POCKET FOR PM100W

R557BY005 - 1" x 1/2" x 1" UPPER T-PIECE
WITH SENSOR POCKET FOR HIGH LIMIT PROBE

R252Y001 - ISOLATING PUMP VALVE
1.5" x 1" CONNECTIONS

PUMP - WILO YONOS PARA RS 25/6
1.5" CONNECTIONS, 130MM

R252Y001 - ISOLATING PUMP VALVE
1" x 1.5" CONNECTIONS

R557DY005 - 1" x 1" x 1" LOWER T-PIECE
CONNECTIONS 1" x 1" x 1"

R462LX001 - THERMOSTATIC HEAD
LIMITING FROM 20-70°C. TO INC. POCKET, **R462LX002**

R557PY005 - 1" x 1" TAIL PIECE
& SELF SEALING

R558VY - 1" RETURN MANIFOLD BAR
WITH **R450X001** MICROMETRIC BALANCING VALVES

R227Y003 - 1/2" x 6MM POCKET FOR PM100W

R881Y003 - 1/2" AUTOMATIC AIRVENT (AAV)

R225Y001 - 1/2" PRESSURE GAUGE
REQUIRES 010A02802 BRASS BUSH - 3/8" TO 1/2"

R554AY005 - SELF SEALING END PIECE

R147NY004 - 3/4" x 3/4" PRESSURE DIFFERENTIAL VALVE

R608Y013 - 1/2" FILL & DRAIN POINT

R588FY005 - BRACKETS

BYPASS (SECTION OF UHF PIPE)

R881Y003 - 1/2" AUTOMATIC AIRVENT (AAV)

R554DY005 - SELF SEALING END PIECE

R540Y002 - 3/8" TEMPERATURE GAUGE

R608Y013 - 1/2" FILL & DRAIN POINT

- TEMPERATURE RANGE 5-110°C.
- MAX. WORKING PRESSURE 10 BAR.

**** F/R VALVES HAVE NOT BEEN LABELLED, VARIATIONS OVERLEAF.**